



Diesel Generator Set QSK60 Series

2000-2250 kVA Prime



Reliable and Durable

Cummins® 'QSK60 series' (Quantum leap in product technology) diesel engine with strong regrindable crankshaft, high strength connecting rod, high pressure injection full authority electronic fuel system, 2 pump 2 loop coolant system. 'QSK60 series' generating sets are more reliable and durable. Engines have clocked millions of hours operating in some of the world's most demanding conditions. Current engines are regularly upgraded with new technologies for better performance and economy. The ultimate proof of superior performance and reliability is the fact that Cummins® manufactures these engines in India.

Unmatched Warranty

Cummins® 'QSK60 series' diesel engine generating sets are a truly cost effective solution to long term power need backed by industry best, 2 years / 5000 hrs warranty, for the entire generating set. With superior experience in technology, design capability, commitment, reliability and quality we offer an unmatched 5 years or 5000 hours (including above 2 years) warranty coverage on 5 critical components (5C) of the engine – Cylinder Head, Camshaft, Crankshaft, Cylinder Block, Connecting Rod against manufacturing defect (5C warranty is offered only for India source product).

Cummins Advantage

Special features of Cummins® 'QSK60 series' engines like full authority electronic injection, low temperature aftercooler, optimised turbocharging and precision injection timing make these engines the ultimate in exceptional fuel efficiency all across the operating range.

Single Source Power Assurance

Design, manufacture and testing of engine, alternator and other accessories is done by Cummins Group of companies for optimum performance and is backed by a countrywide product the entire package.

Standard scope

Engine: Cummins® 'QSK60 series' full authority electronic injection, water cooled engine, 16 cylinder, 4 stroke, rated at 1500 RPM, conforming to ISO 3046 /IS 13018 has the following specifications:

- Cummins Full Authority electronics
- Cummins HPI injectors
- Cummins turbocharger, pulse tuned exhaust manifold, stainless steel exhaust flexible connections (4 Turbos)
- Radiator or heat exchanger, coolant inhibitor
- Plate type lube oil cooler
- Outboard aftercoolers
- Full flow paper element filters - fuel, lube oil and by-pass
- Dry type replaceable paper element air cleaner with restriction indicator
- Flywheel housing & flywheel to suit single bearing alternator
- Starting motor – Electric
- Battery charging alternator
- Cummins PowerCommand® microprocessor based genset controller
- First fill lube oil

Alternator: Stamford brushless alternator

- Separately excited, self-regulated
- Salient pole revolving field
- Single / double bearing
- VPI epoxy impregnated insulation technology
- Re-greasable deep groove Single bearing
- Excitation - PMG based brushless
- Space heaters, RTD/BTD - (without scanner).

Accessories:

- Silencer suitably optimized to reduce noise
- Sturdy base rail
- 990 ltrs. free standing fuel tank
- Batteries with connecting leads and terminals

Optionals

Engine: Heat exchanger, No cool, 398 lts. oil pan

Alternator: Double Bearing

Control Panel: PC3.3

- Bargraph For PC3.3 Panel with kW, Power factor, Frequency, Current, Voltage
- Remote HMI

AMF control panel, Battery charger, Remote/Auto start panel, Auto/

Manual synchronizing panel, Audio/Visual annunciation for faults

Control panel:**PowerCommand® PC 3.3 with MLD**

The PowerCommand® control system is an integrated microprocessor based generator set control system providing voltage regulation, engine protection, alternator protection, operator interface and isochronous governing.

AmpSentry™ – Includes integral AmpSentry™ protection, which provides a full range of alternator protection function which are matched to the alternator provided.

Power Management – Control function provides battery monitoring, testing and a smart starting control system.

Advanced Control Methodology – Three phase sensing, FET based full wave rectified voltage regulation and a PWM output for stable operation with all load types.

Communications Interface – Control comes standard with PCCNet and Modbus interface.

Regulation Compliant – Prototype tested: UL, CSA and CE compliant.

Service - InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

Reliable Design – For reliable operations in harsh environment.

Multi-language support

Independent of PC/ laptop for setting up

Operator panel features

Operator Panel Features – The operator panel, in addition to the alternator, displays the Utility/ AC Bus data.

Operator/ Display Functions

- 320 x 240 pixels graphic LED backlight LCD with bar graph for displaying electrical parameters
- Auto, manual, start, stop, fault reset and lamp test/panel lamp switches
- Alpha-numeric display with pushbuttons
- LED lamps indicating genset running, remote start, not in auto, common shutdown, common warning, manual run mode, auto mode and stop

Paralleling Control Functions

- Digital frequency synchronization and voltage matching
- Isochronous kW and kvar load sharing controls
- Droop kW and kvar control
- Sync check
- Extended paralleling (Peak Shave/Base Load)
- Digital power transfer control (AMF) provides load transfer operation in open or closed transition or soft (ramping) transfer mode

Alternator Data

- Line-to-neutral and line-to-line AC volts
- 3-phase AC current
- Frequency
- kW, kvar, power factor kVA (three phase and total)

Engine Data

- DC voltage
- Engine speed
- Lube oil pressure
- Coolant temperature/ low level
- Comprehensive FAE data (where applicable)

Other Data

- Genset model data
- Start attempts, starts, running hours, kW hours
- Load profile (operating hours at % load in 5% increments)
- Fault history
- Data logging and fault simulation (requires InPower)

Standard control functions**Digital Governing**

- Integrated digital electronic isochronous governor
- - Temperature dynamic governing

Digital Voltage Regulation

- Integrated digital electronic voltage regulator
- 3-phase, 4-wire line-to-line sensing
- Configurable torque matching

AmpSentry™ AC Protection

- AmpSentry™ protective relay
- Over current and short circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse var shutdown
- Field overload

Engine protection

- Battery voltage monitoring, protection and testing
- Over speed shutdown
- Low oil pressure warning and shutdown
- High coolant temperature warning and shutdown
- Low coolant level warning or shutdown
- Low coolant temperature warning
- Fail to start (over crank) shutdown
- Fail to crank shutdown
- Cranking lockout
- Sensor failure indication
- Low fuel level warning or shutdown

MLD features

- Load dependent start/stop
- Run hour equalization
- Built-in Logic
- Single point MLD setting
- System monitoring
- Master-less
- Single point remote start
- Predictive Load input
- Dedicated screens

Telematics Offerings

- Fault Code Alerts on Email & SMS
- Advisory Services
- Fuel Level Monitoring on Email & SMS
- Multiple Gensets Central Monitoring
- Automatic Reports Generation

Technical Data

Generator set specifications

Model	C2000 D5 P	C2250 D5 P
Prime Power Rating kVA	2000	2250
Output Voltage and Frequency	415V/ *3.3/ *6.6/ 11kV - 50Hz	415V/ *3.3/ *6.6/ 11kV - 50Hz
Power Factor	0.8 (lag)	0.8 (lag)
No. of phases	3 phase	3 phase

Engine specifications

Make	Cummins	Cummins
Model	QSK 60 G4	QSK 60 G8
No. of cylinders	16	16
Aspiration	Turbocharged - LTA Aftercooled	Turbocharged - LTA Aftercooled
Bore x Stroke	159 mm x 190 mm	159 mm x 190 mm
Displacement	60.2 ltrs	60.2 ltrs
Output - Prime	2319 bhp (1730 kWm)	2603 bhp (1942 kWm)
Fuel consumption @ 75% load with Rad/HE	291/281 ltr/hr	331/321 ltr/hr
Fuel consumption @ 100% load with Rad/HE 390/380 ltr/hr	390/380 ltr/hr	441/430 ltr/hr
Total wet weight (engine + radiator)	9904 kg	9904 kg
Length x Width x Height (engine)	2780 x 1591 x 1960 mm	2780 x 1591 x 1960 mm
Compression Ratio	14.5:1	14.5:1
Piston Speed	9.5 m/s	9.5 m/s
Governor / Class	Electronic / A1	Electronic / A1
Lubricating oil sytem capacity	280/398 ltrs	398 ltrs
Coolant capacity (engine + radiator)	621 ltrs	621 ltrs
Combustion air intake @ 100% load (+/- 5%)	136 m ³ /min	156 m ³ /min
Exhaust Temperature	430 °C	485 °C

Alternator specifications

Make	Stamford-LT	Stamford-HT	Stamford-LT	Stamford-HT
Frame size / Model No.	PI734F	HVSI804R	PI734H	HVSI804R
Voltage Regulation	± 0.5%	± 0.5%	± 0.5%	± 0.5%
Insulation	Class H	Class F	Class H	Class F
Standard Enclosure	IP 23	IP 23	IP 23	IP 23
Winding Pitch	2 / 3 Pitch	2 / 3 Pitch	2 / 3 Pitch	2 / 3 Pitch
Stator Winding	Double layer lap, form wound	Double layer lap, form wound	Double layer lap, form wound	Double layerlap, form wound
Rotor Dynamically balanced with grade 2.5	Dynamically balanced with grade 2.5	Dynamically balanced with grade 2.5	Dynamically balanced with grade 2.5	Dynamically balanced with grade 2.5
Wave form distortion	No load < 1.8 %, non distorting balanced linear load < 5 %	No load < 1.5 %, non distorting balanced linear load < 3 %	No load < 1.8 %, non distorting balanced linear load < 5 %	No load < 1.5 %, non distorting balanced linear load < 5 %
Total Harmonic Factor	Better than 2%	Better than 2%	Better than 2%	Better than 2%

* Refer to Factory for 3.3/*6.6 KV & Alternator frame

Conformance Standards

IS/IEC 60034-1, BS 5000, IS 1460, ISO 8528, IS 13018, ISO 3046, ISO 9001

Rating Definitions


Prime Power (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046 and IS 13018.

- Fuel consumption data is based on diesel having specific gravity of 0.85 and conforming to IS:1460
- Fuel consumption tolerance is +5%

Typical Diesel Genset Dimensions*

Genset Model	Rating (kVA)	Length (mm)	Width (mm)	Height (mm)	Weight (kgs.) (Wet)	Std. Fuel Tank Capacity (Ltrs - External)
C2000D5P	2000 kVA	5950	2594	3304	17333	990
C2250D5P	2250 kVA	6175	2494	3115	16546	990

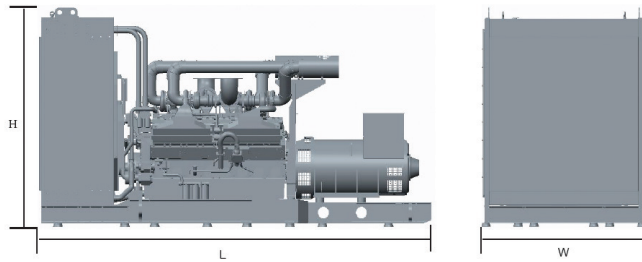

Authorised Representative

Cummins Power System Offices

- Bengaluru: Tel.: (080) 2325 9161 / 63, 2325 9165 / 67
Fax: (080) 2325 9164
- Chandigarh: Tel.: (0172) 224 0371-73
Fax: (0172) 224 0372
- Chennai: Tel.: (044) 2446 8110 / 2446 8113
Fax: (044) 2491 1120
- Gurgaon: Tel.: (0124) 391 0900-01
Fax : (0124) 391 0916
- Hyderabad: Tel.: (040) 2340 9970 / 2340 9980
Fax: (040) 2340 9990
- Jaipur: Tel.: (0141) 236 4944
Fax: (0141) 403 8794
- Kolkata: Tel.: (033) 2287 8065 / 2287 2481
Fax: (033) 2290 3839
- Lucknow: Tel.: (0522) 230 5049 / 230 5059
Fax: (0522) 230 5035
- Mohali: Tel.: (0172) 224 0371 / 72 / 73
Fax: (0172) 224 0371 / 72 / 73
- Vadodara: Tel.: (0265) 233 0627 / 3053627
Fax: (0265) 234 0623



Visit our facebook page at :
Cummins Power Generation India



“Our energy working for you.”

Cummins is registered trademarks of Cummins Inc.
Specifications are subject to change without notice.
PSBU/022/QSK 60-2000-2250 kVA/HD/MP/Revision-3 (03/2019)



**Cummins India Limited
Power Systems Business**
Cummins India Office Campus
Tower-A, 8th Floor, S. No. 21,
Balewadi, Pune – 411 045 (India)

Email: cpgindia@cummins.com
www.cumminsindia.com